

GEM Stat™
DIGITAL THERMOSTAT

FEATURES & BENEFITS


GEM Stat™

Digital thermostat

FEATURES & BENEFITS



The **GEM Stat™** Digital Thermostat saves energy and increases guest comfort. It works with any split system or remote thermostat-capable PTAC/PTHP unit.

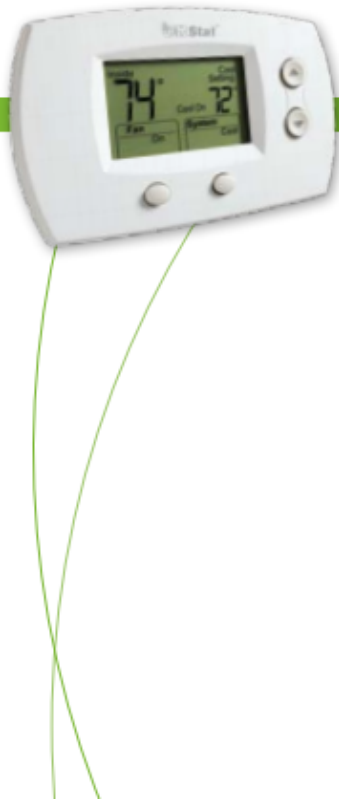

Features

- Simple for guests to understand and operate
- Increases guest comfort and satisfaction
- Stands alone, or can be interfaced to GEM System® or GEM Link™ Energy Management for maximum energy savings
- Suitable for new construction or retrofit applications
- Programmable Temperature Limits
- Large backlit display is easily read, day or night
- Permanent memory maintains temperature setpoints in the event of power loss
- Simultaneous Heat and Cool setpoint storage
- LCD continuously displays setpoint and room temperature
- Selectable °F or °C display
- Manual Changeover and/or Auto Changeover

Digital thermostat

The **GEM Stat™** Digital Thermostat saves energy and increases guest comfort. It works with any split system or remote thermostat-capable PTAC/PTHP unit.

- Simple for guests to understand and operate
- Increases guest comfort and satisfaction
- Stands alone, or can be interfaced to GEM System® or GEM Link™ Energy Management for maximum energy savings

- Suitable for new construction or retrofit applications
- Programmable Temperature Limits
- Large backlit display is easily read, day or night
- Permanent memory maintains temperature setpoints in the event of power loss
- Simultaneous Heat and Cool setpoint storage
- LCD continuously displays setpoint and room temperature
- Selectable °F or °C display
- Manual Changeover and/or Auto Changeover

Application

For Use With:

- PTAC Units (Package Terminal Air Conditioner)
- Heat Pumps (single-stage or multi-stage)
- Split Systems
- Standard Heat/Cool or Heat Only/Cool Only Systems
- Gas or Oil Fired Systems
- Hydronic (hot water or steam) Systems

Connection

**GEM System®
or GEM Link™**
Infrared Occupancy Sensor



Optional
Energy Management
Connection

GEM Stat™
Digital Hotel Thermostat



877.GEM.SYSTEM

SPECIFICATIONS

- **Electrical Rating:**
20 to 30 VAC 50/60 Hz. Or DC
OR Battery Powered / Battery Backup
0.05 to 1.0 Amps (Load per terminal)
- **Setpoint Temperature Range:**
40°F to 99°F (4.5°C to 37°C)
- **Programmable Temperature Limits:**
Heat: 40°F to 90°F (4.5°C to 32°C)
Cool: 50°F to 99°F (10.5°C to 37°C)
- **Operating Ambient Temperature Range:**
32°F to 120°F
- **Shipping Temperature Range:**
-20°F to 120°F
- **Dimensions:**
5 13/16" W x 3 9/16" H x 1 1/2" D

GEM System® or GEM Link™ Infrared Occupancy Sensor

Optional Energy Management Connection

GEM Stat™ Digital Hotel Thermostat

877.GEM.SYSTEM

For Use With:

- PTAC Units (Package Terminal Air Conditioner)
- Heat Pumps (single-stage or multi-stage)

- Split Systems
- Standard Heat/Cool or Heat Only/Cool Only Systems
- Gas or Oil Fired Systems
- Hydronic (hot water or steam) Systems



p: 540.362.7500 • 877.GEM.SYSTEM • f: 540.366.6521 • e: info@lodgingtechnology.com
www.lodgingtechnology.com • 5431C Peters Creek Road • P.O. Box 7919 • Roanoke, Virginia 24019-0919 USA



p: 540.362.7500 • 877.GEM.SYSTEM • f: 540.366.6521 • e: info@lodgingtechnology.com
www.lodgingtechnology.com • 5431C Peters Creek Road • P.O. Box 7919 • Roanoke, Virginia 24019-0919
USA

© 2008 LTC Enterprises, LLC